


NO.	Bushing	L
1	DT10N1250	215
2	DT10N1250 DT20N1250	265
3	DT20N1250 DT30N1250	340
4	DT30N1250	440
5	DT33/250/990	480
6	DT33/250/1260	495
7	DT33/250/1320	530

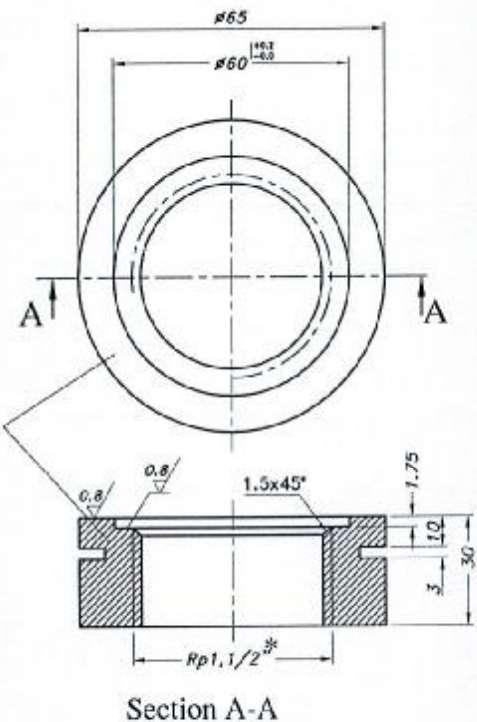

with protection relay
without protection relay

* عملیات رزوه زنی بعد از جوشکاری فلانش به نوله و به طور همزمان انجام شود.
Semifinished (part 1): Forging
Uncertain tolerances according to DIN ISO 2768-m

Uncertain tolerances according to DIN ISO 2768-m									
1	1	6	Flat washer						
		-			ND 0J 06 009				
-	1	5	Fastening cap			St.37			
		-	DIN 1691(DIN EN 1561)						
1	1	4	Oil level sight glass						
		-			TUN 900101				
1	1	3	Socket						
		-			ND 0B 03 018				
1	1	2	Pipe			St.33	ø48.3x3.25xL - (1,1/2")		
		-	DIN 2440						
1	1	1	Flange			St.37-2	ø65*ø44*30		
		-							
Qt.	Item No. Index	Description			Identity No.	Material Standard	Dimension	Mass. Kg	
Index	Mod.No.	Date	Modifications			Signature	Title: Filling Pipe (R 1,1/2") (for oil sight glass with protection relay or just oil sight glass installing)		
							Ordered by:		
Tolerance:		Group:		Applied by:		Drawing Identification:			
				Z.Aejadi		I T R I - - R 1 1			
Scale: --				Check by:		Drawing No.:			
				A.Karamzadeh		ND 0 B 0 3 - 0 1 7 -			
				Approved by:		Date:		Page Count No.:	
				F.Joulaei		1399/06/16		1	
								Page No.:	
								1-	



شرکت ترانسفورماتور توزیع زنجان

ZANJAN DISTRIBUTION TRANSFORMER CO.



شرکت ترانسفورماتور توزیع زندگان
ZANGAN DISTRIBUTION TRANSFORMER CO.